


# STEALTH 3250B

A035\_0519

Booth filter with dump regulator, gauge, and multiport manifold

*Perfect after-filter for desiccant dryers and as final paint air filter*

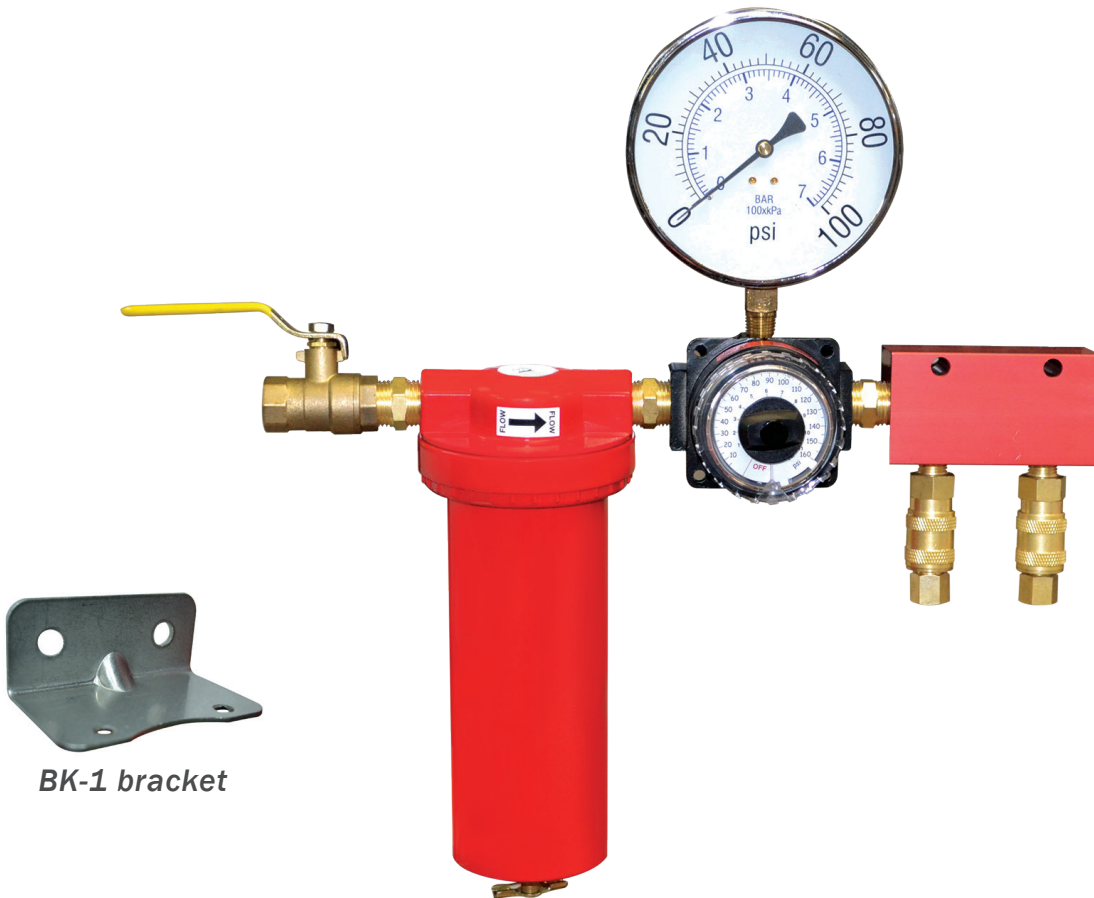

**BK-1 bracket**

## Features & Benefits

- Quick disconnect clamp ring design
- 0.01 micron at 99.99998% efficiency
- Equipped with brass petcock manual drain
- Unit comes with a BK-1 bracket and BV-051 ball valve
- 0-100 PSI oversized gauge with glass face for quick, easy reading, and MA500-4 multiport manifold with quick disconnects
- Cleaner compressed air with no oil to your applications
- ½" high flow regulator/gauge

## Specifications

|                             |                    |
|-----------------------------|--------------------|
| <i>Max. Pressure</i>        | 200 PSIG           |
| <i>Flow Capacity</i>        | 60 SCFM at 100 PSI |
| <i>Max. Operating Temp.</i> | 125°F              |
| <i>Replacement Element</i>  | 3C-060             |
| <i>Height</i>               | 15.00"             |
| <i>Length</i>               | 15.75"             |
| <i>Depth</i>                | 3.75"              |
| <i>Weight</i>               | 8 lbs.             |

CA PROPOSITION 65 WARNING



**WARNING:** Cancer and Reproductive Harm

[www.P65Warnings.ca.gov/product](http://www.P65Warnings.ca.gov/product)



(800) 521-9200



[www.driair.com](http://www.driair.com) | [www.rti-pbe.com](http://www.rti-pbe.com)



@RTiPBE



@rti\_pbe



Removes: ● ●

1.0 micron • 60 SCFM • Brass Manual Petcock Drain



**1/4"**    **STEALTH 6900B**    No Regulator, 1/2" NPT ports  
**STEALTH 6950B**    Regulator w/ Gauge  
**STEALTH 6952B**    Regulator w/ Gauge, (2) 1/4" Outlets

**3/8"**    **STEALTH 3050B**    Regulator w/ Gauge  
**STEALTH 3052B**    Regulator w/ Gauge, (2) 3/8" Outlets

Removes: ● ● ●

1.0 micron • 60 SCFM • Brass Manual Petcock Drain



**1/4"**    **STEALTH 6910B**    No Regulator, 1/2" NPT ports  
**STEALTH 6960B**    Regulator w/ Gauge  
**STEALTH 6962B**    Regulator w/ Gauge, (2) 1/4" Outlets

**3/8"**    **STEALTH 3060B**    Regulator w/ Gauge  
**STEALTH 3062B**    Regulator w/ Gauge, (2) 3/8" Outlets

Removes: ● ●

0.01 micron • 60 SCFM • Brass Manual Petcock Drain



**1/4"**    **STEALTH 7000B**    Regulator w/ Gauge  
**STEALTH 7800B**    No Regulator, 1/2" NPT ports

**1/2"**    **STEALTH 1000B**    Regulator w/ Gauge  
**STEALTH 1500B**    Regulator w/ Gauge and manifold  
**STEALTH 1700B**    Regulator w/ Gauge and manifold  
**STEALTH 3250B**    Regulator w/ Oversized Gauge/manifold

**3/8"**    **STEALTH 7030B**    Regulator w/ Gauge

Removes: ● ● ●

0.01 micron • 60 SCFM • 1st Stage: Automatic Float Drain  
2nd Stage: Brass Manual Petcock Drain



**1/2"**    **STEALTH 6062B**    Regulator w/ Gauge and manifold

**3/8"**    **STEALTH 6060B**    Regulator w/ Gauge

**3/4"**    **STEALTH 7500**    Regulator w/ Gauge, no bracket

Note: All Stealth units feature 1/2" NPT Inlet, Max Pressure: 200 PSI, Max Temp: 125°F | Removal Key: ● Water ● Dirt ● Oil

CA PROPOSITION 65 WARNING



**WARNING:** Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov/product](http://www.P65Warnings.ca.gov/product)



(800) 521-9200

[www.driair.com](http://www.driair.com) | [www.rti-pbe.com](http://www.rti-pbe.com)

@RTiPBE

@rti\_pbe

