

STEALTH unit



Features and Benefits

- Inverse-Flow® Technology with 3½" filter depth
- Quick disconnect clamp ring design
- 1.0 micron final filtration
- Spin-on/spin-off element
- Now featuring three ¾" outlets
- Equipped with brass petcock manual drain
- Rated for 60 scfm
- Available with activated carbon for oil removal
- Non-corrosive internal metal
- Pressure regulator & gauge standard
- Cleaner compressed air with no oil to your applications
- Simple design requires no tools
- Easy service of elements
- Extremely long element life
- 99.99998% Effective at oil removal with activated carbon

Specifications

- Replacement Element: 6950-1
- Maximum Air Pressure: 150 PSIG
- Maximum Operating Temp.: 125° F
- Maximum Flow: 60 SCFM @ 100 PSI
- ½" Brass Ball Valve - BV-051

Applications

- Air Tools, Sand Blasting, Sanding Impacts, Buffing
- Ideal for Mechanical Section of Shop

CA PROPOSITION 65 WARNING



WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov/product



(800) 521-9200



www.driair.com | www.rti-pbe.com



@RTiPBE



@rti_pbe



Removes:  

1.0 micron • 60 SCFM • Brass Manual Petcock Drain



1/4"	STEALTH 6900B	No Regulator, 1/2" NPT ports
	STEALTH 6950B	Regulator w/ Gauge
	STEALTH 6952B	Regulator w/ Gauge, (2) 1/4" Outlets
3/8"	STEALTH 3050B	Regulator w/ Gauge
	STEALTH 3052B	Regulator w/ Gauge, (2) 3/8" Outlets

Removes:   


1.0 micron • 60 SCFM • Brass Manual Petcock Drain



1/4"	STEALTH 6910B	No Regulator, 1/2" NPT ports
	STEALTH 6960B	Regulator w/ Gauge
	STEALTH 6962B	Regulator w/ Gauge, (2) 1/4" Outlets
3/8"	STEALTH 3060B	Regulator w/ Gauge
	STEALTH 3062B	Regulator w/ Gauge, (2) 3/8" Outlets

Removes:  

0.01 micron • 60 SCFM • Brass Manual Petcock Drain

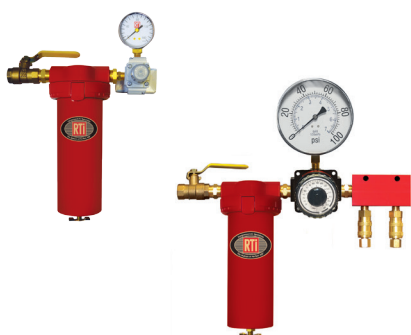

1/4"	STEALTH 7000B	Regulator w/ Gauge
	STEALTH 7800B	No Regulator, 1/2" NPT ports
1/2"	STEALTH 1000B	Regulator w/ Gauge
	STEALTH 1500B	Regulator w/ Gauge and manifold
	STEALTH 1700B	Regulator w/ Gauge and manifold
	STEALTH 3250B	Regulator w/ Oversized Gauge/manifold
3/8"	STEALTH 7030B	Regulator w/ Gauge

Removes:   

0.01 micron • 60 SCFM • 1st Stage: Automatic Float Drain
2nd Stage: Brass Manual Petcock Drain



1/2"	STEALTH 6062B	Regulator w/ Gauge and manifold
3/8"	STEALTH 6060B	Regulator w/ Gauge
3/4"	STEALTH 7500	Regulator w/ Gauge, no bracket

Note: All Stealth units feature 1/2" NPT Inlet, Max Pressure: 200 PSI, Max Temp: 125°F | Removal Key:  Water  Dirt  Oil

CA PROPOSITION 65 WARNING



WARNING: Cancer and Reproductive Harm

www.P65Warnings.ca.gov/product



(800) 521-9200



www.driair.com | www.rti-pbe.com



@RTiPBE



@rti_pbe

