

Take a look at what units are best for your paint

EH4000-4R / EH7000-4R

- Designed to provide continuous dry, oil-free air to -40°F dew point
- 3 in 1: Activated carbon pre-filter for superior oil vapor removal and built-in final filter with contained desiccant cartridge, no desiccant dust migration
- Tool-less spin on/spin off elements, no tools required for easy maintenance
- Inverse Flow® Technology, low pressure drop design
- Designed for use in prep station and paint booth
- Both designed with high flow ½" regulator/gauge



PERF-25 / PERF-50


- Constant -40°F Dew Point and 0% CAH
- No desiccant maintenance for 3 years
- Pre-filter removes water, dirt, and oil (removes all oil mist)
- Final filter removes desiccant dust
- One gun system (PERF-25) and two gun system (PERF-50)
- The best system for shops spraying waterborne finishes
- Desiccant needs to be changed every 3-5 years



PERF-25

BRAD-PERF-25C / BRAD-PERF-50C

- Designed for breathing air
- One gun system: BRAD-PERF-25C
two gun system: BRAD-PERF-50C
- Constant -40°F Dew Point and 0% CAH
- No desiccant maintenance for 3 years

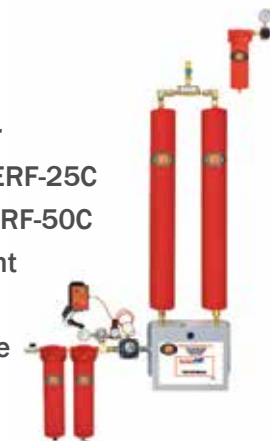

BRAD-PERF-50C

BRAD-BD1 / BRAD-BD2

- Monitors Grade "D" breathable air, rated up to 60 SCFM
- Deep bed activated carbon pre filter for hydrocarbon removal to 0.003 ppm
- 0.01 micron final filter designed for fine particulate and oil removal at 99.9998% efficiency



BRAD-BD1

CA PROPOSITION 65 WARNING



WARNING: Cancer and Reproductive Harm

www.P65Warnings.ca.gov/product



(800) 521-9200



www.driair.com | www.rti-pbe.com



@RTiPBE



@rti_pbe



Take a look at what units are best for your paint

PH35C / PH50C

- Uniform conductive flexible liner assures contact with fittings for the life of the hose
- No wires to break when hose is flexed
- Silicone-free
- Higher transfer efficiency especially with plastic components like bumpers
- Available in 35' and 50' lengths



PH35C

Replacement Elements / Kits



PERF-25-MK:

(1) 3P-060, (2) 3C-060

PERF-25-RK:

(1) 3P-060, (2) 3C-060,
(2) D-05, (4) RTi-SF-4,
(1) RTi-TP-651



PERF-25-TC:

(2) Pre-packed desiccant
towers with fittings
(1) RTi-TP-651

PERF-25-TCMK:

(2) Pre-packed desiccant
towers with fittings,
(1) 3P-060, (2) 3C-060, (1)
RTi-TP-651



PERF-50-MK:

(1) 3P-090, (1) 3C-090,
(1) 3C-060

PERF-50-RK:

1) 3P-090, (1) 3C-090,
(1) 3C-060, (3) D-05,
(4) RTi-SF-4, (1) RTi-TP-651



PERF-50-TC:

(2) Pre-packed desiccant
towers with fittings
(1) RTi-TP-651

PERF-50-TCMK:

(2) Pre-packed desiccant
towers with fittings,
(1) 3P-090, (1) 3C-090,
(1) 3C-060, (1) RTi-TP-651

PERF-55HD

- Regenerative Desiccant Dryer
- Consistant -40°F Dew Point and 0% CAH
- Handles flow from 15 HP compressors
- 0.01 micron pre- and after filter
- Mainline or multiple booth use
- Provides faster cure times and increased productivity
- Turnkey system; No assembly required!



PERF-55HD

CA PROPOSITION 65 WARNING



WARNING: Cancer and
Reproductive Harm
www.P65Warnings.ca.gov/product



(800) 521-9200



www.driair.com | www.rti-pbe.com



@RTiPBE



@rti_pbe

