


STEALTH 1500B

A092_0220

Booth filter with multiport manifold

Perfect after-filter with 1/2" heavy duty regulator for desiccant dryers

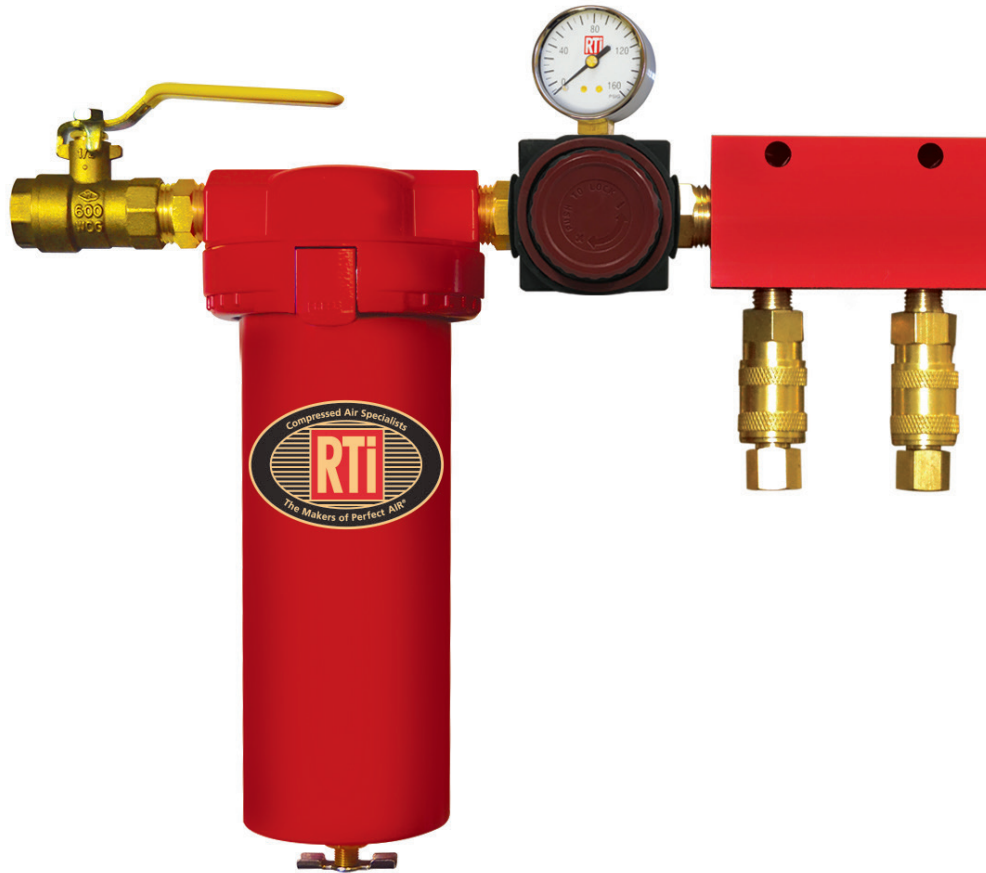

Features & Benefits

- Booth filter with 1/2" heavy duty regulator, multiport manifold, two (2) HFMC-1 couplers, and mounting brackets
- Easily installed in RTi's Blue Pipe systems
- Features 1/2" inlet/outlet
- Brass manual petcock drain
- Rugged, heavy duty high-flow design
- All metal, corrosion-resistant anodized aluminum body on the regulator
- Tee handle knob, relieving type regulator
- Featuring a BV-051 ball valve

Specifications

<i>Max. Pressure</i>	200 PSIG
<i>Filter Capacity</i>	0.01 micron at 99.99998% efficiency
<i>Flow Capacity</i>	60 SCFM at 100 PSI
<i>Max. Operating Temp.</i>	125°F
<i>Replacement Element</i>	3C-060
<i>Height</i>	12"
<i>Length</i>	10.5"
<i>Depth</i>	3.9"

CA PROPOSITION 65 WARNING



WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov/product



(800) 521-9200



www.driair.com | www.rti-pbe.com



@RTiPBE



@rti_pbe



Removes: ● ●

1.0 micron • 60 SCFM • Brass Manual Petcock Drain



- 1/4"** **STEALTH 6900B** No Regulator, 1/2" NPT ports
- STEALTH 6950B** Regulator w/ Gauge
- STEALTH 6952B** Regulator w/ Gauge, (2) 1/4" Outlets
- 3/8"** **STEALTH 3050B** Regulator w/ Gauge
- STEALTH 3052B** Regulator w/ Gauge, (2) 3/8" Outlets

Removes: ● ● ●

1.0 micron • 60 SCFM • Brass Manual Petcock Drain



- 1/4"** **STEALTH 6910B** No Regulator, 1/2" NPT ports
- STEALTH 6960B** Regulator w/ Gauge
- STEALTH 6962B** Regulator w/ Gauge, (2) 1/4" Outlets
- 3/8"** **STEALTH 3060B** Regulator w/ Gauge
- STEALTH 3062B** Regulator w/ Gauge, (2) 3/8" Outlets

Removes: ● ●

0.01 micron • 60 SCFM • Brass Manual Petcock Drain



- 1/4"** **STEALTH 7000B** Regulator w/ Gauge
- STEALTH 7800B** No Regulator, 1/2" NPT ports
- 1/2"** **STEALTH 1000B** Regulator w/ Gauge
- STEALTH 1500B** Regulator w/ Gauge and manifold
- STEALTH 1700B** Regulator w/ Gauge and manifold
- STEALTH 3250B** Regulator w/ Oversized Gauge/manifold
- 3/8"** **STEALTH 7030B** Regulator w/ Gauge

Removes: ● ● ●

0.01 micron • 60 SCFM • 1st Stage: Automatic Float Drain
2nd Stage: Brass Manual Petcock Drain



- 1/2"** **STEALTH 6062B** Regulator w/ Gauge and manifold
- 3/8"** **STEALTH 6060B** Regulator w/ Gauge
- 3/4"** **STEALTH 7500** Regulator w/ Gauge, no bracket

Note: All Stealth units feature 1/2" NPT Inlet, Max Pressure: 200 PSI, Max Temp: 125°F | Removal Key: ● Water ● Dirt ● Oil

CA PROPOSITION 65 WARNING



WARNING: Cancer and Reproductive Harm
www.P65Warnings.ca.gov/product



(800) 521-9200

www.driair.com | www.rti-pbe.com

@RTiPBE

@rti_pbe

